

2-PC BALL VALVE THREAD END

二片式内螺纹球阀




特点 Features

- 全通径 Full port, 1/4"~4" (DN6~DN100)
- 工作压力 W.P.: 1000WOG (PN63)
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- 手柄带锁装置 (可选) Locking device handle (option)
- 螺纹连接标准 Thread type: ASME B1.20.1 (NPT),
DIN 259 / DIN 2999, BS 21,
ISO 288-1, ISO 7-1

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB	CF8	CF8M
2	阀座 SEAT	PTFE		
3	球体 BALL	CF8	CF8	CF8M
4	垫片 GASKET	PTFE		
5	阀盖 BONNET	WCB	CF8	CF8M
6	阀杆 STEM	304	304	316
7	阀杆垫圈 STEM WASHER	PTFE		
8	填料 PACKING	PTFE		
9	填料盖 GLAND	304		
10	手柄 HANDLE	304+PVC		
11	弹簧垫圈 SPRING WASHER	304		
12	螺母 NUT	304		

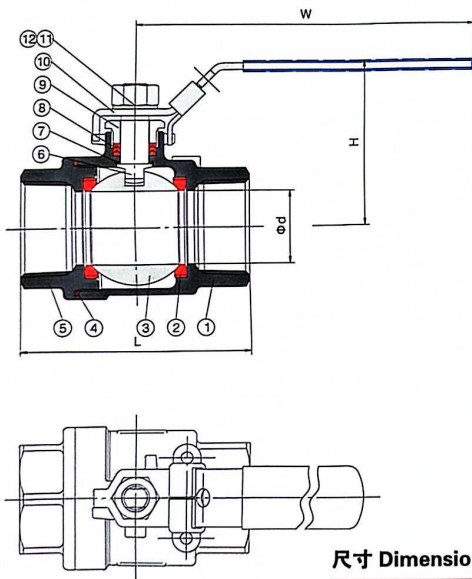

尺寸 Dimensions

Unit: mm

尺寸 SIZE		d	L	H	W
1/4"	DN6	10	55	55	95
3/8"	DN10	12	55	55	95
1/2"	DN15	15	62	55	105
3/4"	DN20	20	71	59	128
1"	DN25	25	81.5	66	146
1-1/4"	DN32	32	96	71	146
1-1/2"	DN40	38	105	82	162
2"	DN50	50	120	90	192
2-1/2"	DN65	65	162	122	220
3"	DN80	80	170.5	135	250
4"	DN100	100	225	156	300

2-PC BALL VALVE THREAD END DIRECT MOUNTING PAD

二片式高平台球阀





特点 Features

- 全通径 Full port, 1/4"~4" (DN6~DN100)
- 工作压力 W.P.: 1000WOG (PN63)
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- 双螺形弹簧动负载设计 Live-loading design
- 防静电装置 (可选) Anti-static device (option)
- 手柄带锁装置 (可选) Locking device handle (option)
- ISO5211直装高平台设计 ISO 5211 Direct mounting pad
- 自动化装置 (可选) Automation accessories (option)
- 螺纹连接标准 Thread type: ASME B1.20.1 (NPT),
DIN 259 / DIN 2999, BS 21, ISO 288-1, ISO 7-1

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB	CF8	CF8M
2	阀座 SEAT	PTFE		
3	球体 BALL	CF8	CF8	CF8M
4	垫片 GASKET	PTFE		
5	阀盖 BONNET	WCB	CF8	CF8M
6	阀杆 STEM	304	304	316
7	阀杆垫圈 STEM WASHER	PTFE+25% GF		
8	O 形圈 O-RING	FPM		
9	填料 PACKING	PTFE		
10	耐磨垫圈 WEAR WASHER	PTFE+25% GF		
11	填料盖 GLAND	304		
12	碟形弹簧 DISC SPRING	304		
13	压盖法兰 GLAND FLANGE	CF8		
14	STOPPER	304		
15	手柄 HANDLE	WCB/CF8		
16	螺栓 BOLT	304		
17	螺母 NUT	304		

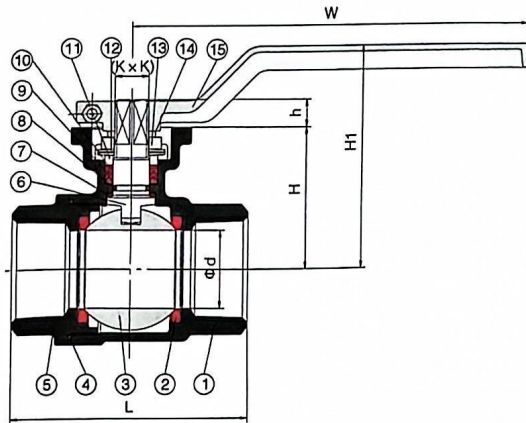

尺寸 Dimensions

Unit: mm

尺寸 SIZE	d	L	H	h	KxK	A	B	Ra	Rb	W	H1	
1/4"	DN6	10	61	34	9	9×9	36	42	3.0	3.0	140	66
3/8"	DN10	12	61	34	9	9×9	36	42	3.0	3.0	140	66
1/2"	DN15	15	61	34	9	9×9	36	42	3.0	3.0	140	66
3/4"	DN20	20	72	42	9	9×9	36	42	3.0	3.0	140	74
1"	DN25	25	78	53	11	11×11	42	50	3.0	3.5	170	88
1-1/4"	DN32	32	95	57	11	11×11	42	50	3.0	3.5	170	92
1-1/2"	DN40	38	106	68	14	14×14	50	70	3.5	4.5	200	106
2"	DN50	50	119	78	14	14×14	50	70	3.5	4.5	200	116
2-1/2"	DN65	65	144	104	17	17×17	70	102	4.5	5.5	300	148
3"	DN80	80	169	115	17	17×17	70	102	4.5	5.5	300	159
4"	DN100	100	205	129	17	17×17	70	102	4.5	5.5	300	173

2-PC BALL VALVE THREAD END DIN3202-M3

二片式内螺纹球阀 德标




特点 Features

- 全通径 Full port, 1/4"~4" (DN6~DN100)
- 工作压力 W.P.: 1000WOG (PN63)
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- 手柄带锁装置 (可选) Locking device handle (option)
- 结构长度 Face to face: DIN3202-M3
- 螺纹连接标准 Thread type: ASME B1.20.1 (NPT),
DIN 259 / DIN 2999, BS 21,
ISO 288-1, ISO 7-1

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB	CF8	CF8M
2	阀座 SEAT	PTFE		
3	球体 BALL	CF8	CF8	CF8M
4	垫片 GASKET	PTFE		
5	阀盖 BONNET	WCB	CF8	CF8M
6	阀杆 STEM	304	304	316
7	阀杆垫圈 STEM WASHER	PTFE		
8	填料 PACKING	PTFE		
9	填料盖 GLAND	304		
10	手柄 HANDLE	304+PVC		
11	弹簧垫圈 SPRING WASHER	304		
12	螺母 NUT	304		

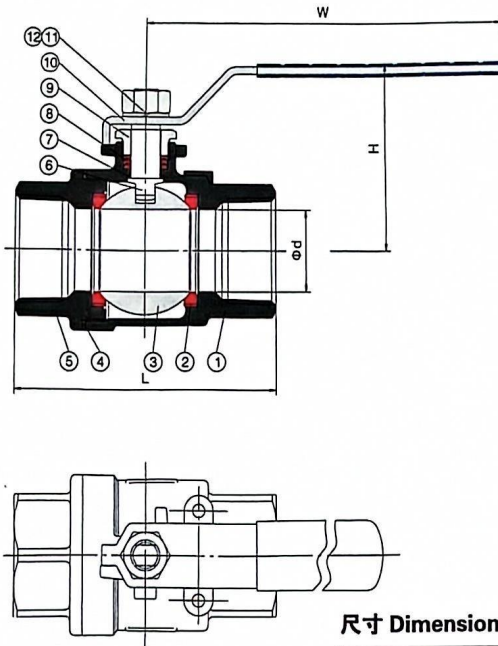


尺寸 Dimensions

Unit: mm

尺寸 SIZE		d	L	H	W
1/2"	DN15	15	75	55	120
3/4"	DN20	20	80	59	120
1"	DN25	25	90	66	145
1-1/4"	DN32	32	110	71	145
1-1/2"	DN40	38	120	82	190
2"	DN50	50	140	90	190
2-1/2"	DN65	65	185	122	240
3"	DN80	80	205	135	250
4"	DN100	100	240	156	300

2-PC BALL VALVE THREAD END 2000/1500WOG

二片式内螺纹球阀

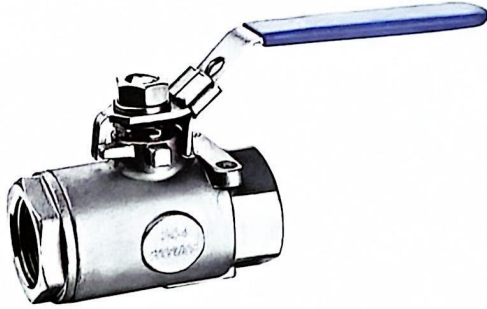


特点 Features

- 缩径 Standard port, 1/4"~2" (DN6~DN50)
- 工作压力 W.P.: 1/4"~1" 2000WOG (PN150)
1-1/4"~2" 1500WOG (PN100)
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- 带锁手柄 Locking device handle
- 平台钻孔和攻丝 (可选) Tapped & drilled mounting pad (option)
- 螺纹连接标准 Thread type: ASME B1.20.1 (NPT),
DIN 259 / DIN 2999, BS 21,
ISO 288-1, ISO 7-1

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB	CF8	CF8M
2	阀座 SEAT	RPTFE		
3	球体 BALL	CF8	CF8	CF8M
4	垫片 GASKET	PTFE		
5	阀盖 BONNET	WCB	CF8	CF8M
6	阀杆 STEM	304	304	316
7	阀杆垫圈 STEM WASHER	PTFE		
8	填料 PACKING	PTFE		
9	填料盖 GLAND	304		
10	手柄 HANDLE	304+PVC		
11	弹簧垫圈 SPRING WASHER	304		
12	螺母 NUT	304		

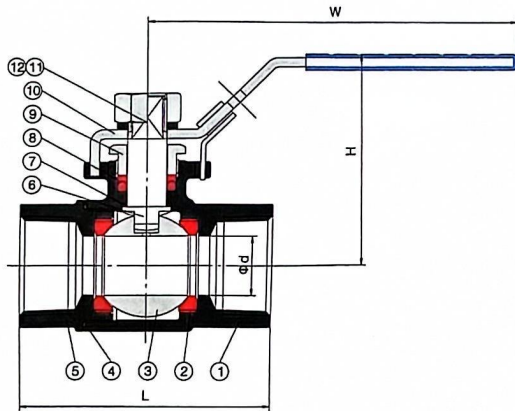

尺寸 Dimensions

Unit: mm

尺寸 SIZE		d	L	H	W
1/4"	DN6	11	57	55	105
3/8"	DN10	12.7	57	55	105
1/2"	DN15	12.7	74	55	105
3/4"	DN20	17.5	80.5	65	130
1"	DN25	22.4	89.5	70	130
1-1/4"	DN32	25	109	90	155
1-1/2"	DN40	32	119	95	155
2"	DN50	38	148.5	100	180

2-PC BALL VALVE THREADED END KOREAN TYPE

二片式韩式螺纹球阀




特点 Features

- 缩径 Reduced port, 1/4"~3" (DN6~DN80)
- 工作压力 W.P.: 600WOG (PN40)
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 阀杆防爆出装置设计 Blow-out proof stem
- 螺纹连接标准 Thread type: ASME B1.20.1 (NPT),
DIN 259 / DIN 2999, BS 21,
ISO 288-1, ISO 7-1

材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀盖 BONNET	WCB	CF8	CF8M
2	垫片 GASKET	PTFE		
3	阀座 SEAT	PTFE		
4	球体 BALL	CF8	CF8	CF8M
5	阀体 BODY	WCB	CF8	CF8M
6	阀杆 STEM	304	304	316
7	阀杆垫圈 STEM WASHER	PTFE		
8	填料 PACKING	PTFE		
9	填料盖 GLAND	304		
10	手柄 HANDLE	304+PVC		
11	弹簧垫圈 SPRING WASHER	304		
12	螺母 NUT	304		

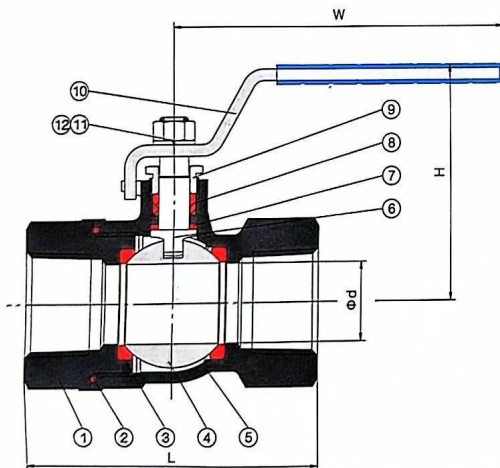

尺寸 Dimensions

Unit: mm

尺寸 SIZE		d	L	H	W
1/4"	DN6	10	50.5	52	85
3/8"	DN10	10	50.5	52	95
1/2"	DN15	10	57	40	95
3/4"	DN20	15	60.5	45	128
1"	DN25	20	73	50	145
1-1/4"	DN32	25	82	55	145
1-1/2"	DN40	32	94.5	65	160
2"	DN50	38	103	75	190
2-1/2"	DN65	50	130	90	220
3"	DN80	65	158	110	250